

Technical Specifications

| | |
|------------------------------------|------------------------------------------------------------------------------|
| Power supply | 6 ... 30VDC |
| Power consumption | typ. 49mW, max. 95mW |
| Power loss | max. 95mW |
| Interfaces | Loxone Tree: connection with Miniserver / Tree Extension |
| Ambient temperature | -20 ... 70°C / -4 ... 158°F |
| Humidity | max. 95% r.H. (non condensing) |
| Touch points | 5 touch points, capacitive touch detection |
| Click feedback | Yes |
| Temperature detection range | -40 ... 125°C / -40 ... 257°F +/- 0.5°C / 0.9°F |
| Humidity detection range | 0 ... 100% r.H. +/- 2% (non condensing) |
| Orientation light | Yes |
| Safety rating | IP40 |
| Dimensions | 80x80x10mm / 3.15x3.15x0.4" (LxWxH) |
| Maintenance & Cleaning | This device is free of maintenance and may only be cleaned with a dry cloth. |

LOXONE

Need Help?

loxone.com/support

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com



V150520

LOXONE



Touch Pure Tree

Part No: 100461 (White)
Part No: 100462 (Anthracite)

About the product

The Loxone Touch Pure has five touch zones, which can be configured according to your needs. The large central touch zone is ideal for controlling lighting, whilst the corner zones are handy for controlling music and blinds, for example.

Features



- 5 touch buttons
- Temperature & Humidity sensor
- Optional click feedback
- Orientation LED light

Installation

Install the mounting frame on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config. To finish the installation attach the Loxone Touch on the mounting frame.

Connection

| | |
|-------------------------------|--------------------------------------------|
| Wire cross-section | 0.25 ... 0.8mm ² / AWG18 ... 23 |
| Stripping length | 5mm / 0.2" |
| Temperature resistance | -40 ... 105°C / -40 ... 221°F |

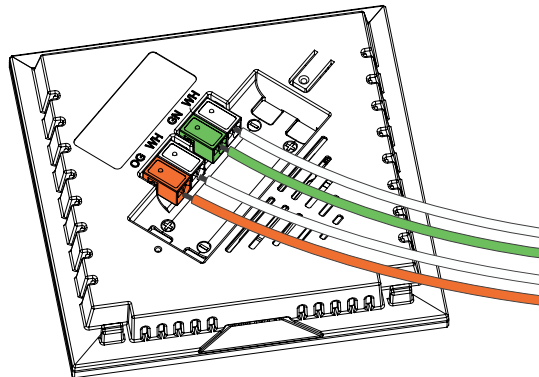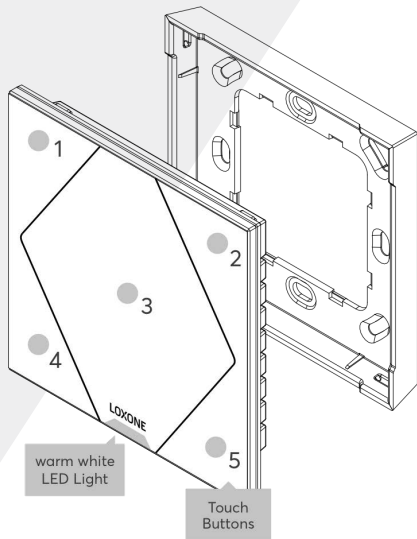

This folder is a part of the product!



For additional information, declaration of conformity, visit www.loxone.com/help/touch-pure-tree